


# PULL HANDLE - BACK TO BACK - GLASS



A

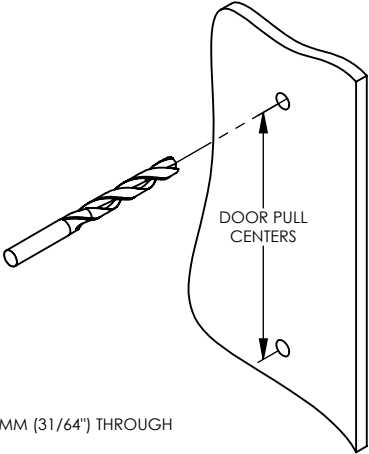


DRILL 12.0MM (31/64") THROUGH

\*ENSURE HOLES ARE PERPENDICULAR WITH DOOR

B

INSTALL M10 FIXINGS & WASHERS

\*ENSURE WASHERS SIT FLUSH WITH DOOR FACE (DO NOT COUNTERBORE)

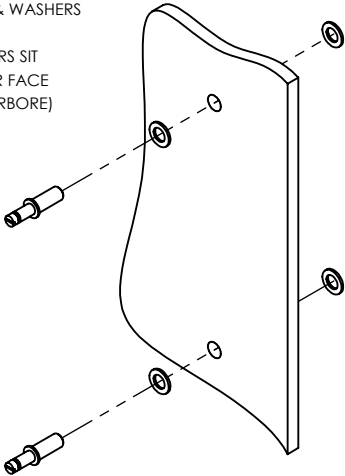


C

INSTALL M10 FIXING SLEEVES INTO DRILLED HOLES

SECURE PULL SIDE DOOR PULL TO M10 THREADED FIXINGS


PUSH SIDE

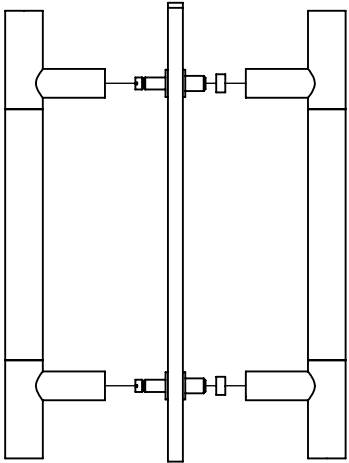


PULL SIDE

D


SECURE PUSH SIDE DOOR PULL USING M5 GRUB SCREWS

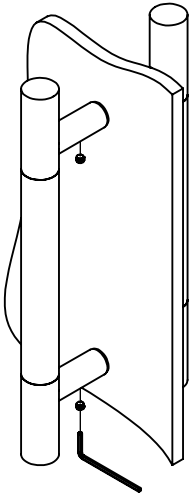


FITTING COMPLETE

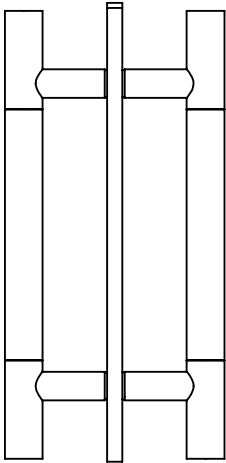

FIXING KIT



M10 FIXING (X2)



ALLEN KEY (X1)



M10 INTERNAL NYLON SLEEVE (X2)



M10 WASHER (X4)



M5 GRUB SCREW (X2)

## TURNSTYLE DESIGNS – CARE OF MATERIALS AND FINISHES



### BRASS – PLATED FINISHES

*Bright Chrome (BC) - INT/EXT / Matt Black Chrome (CB) - INT/EXT / Polished Nickel (PN) - INT / Satin Nickel (SN) - INT*

Wipe clean with a soft, damp cloth and dry with a clean, soft cloth.

### BRASS – LIVING FINISHES

*Burnished Brass (BH) - INT/EXT / Burnished Nickel (NH) - INT / Fine Antique Brass (FA) - INT/EXT / Polished Brass (PU) - INT/EXT / Satin Brass (TW) - INT*

*Vintage Nickel (VN) - INT / Vintage Patina (VP) - INT/EXT*

Living finishes will develop their own individual patina over time as they react with their environment. Once installed a number of factors such as handling, age and environment will lead to gradual wear and oxidation, resulting in each piece developing a unique character and elegance. This is a natural process and is a feature, not a fault, of the base material or finishing technique.

Living finishes are supplied with a protective wax coating to protect the product during transit and installation. These finishes should be cleaned with a soft, lint free cloth, a good quality wax can be reapplied if desired. Polished Brass (PU) can be cleaned with a brass metal polish should you wish to maintain its shiny appearance.

### LEATHER

*Black (BL) - INT / Bridle White (BW) - INT / Chestnut (CN) - INT / Chocolate (CT) - INT / Slate Grey (GC) - INT / Tan (TA) - INT*

Leather is a natural material that will age over time and with use, developing a unique patina; this is part of its character and should be expected. Wipe leather surfaces clean with a soft, damp cloth using heavily diluted soapy water (1 part soap to 12 parts water) then dry with a clean, soft cloth. Once dry, the leather can be fed with a quality beeswax or neutral leather cream.

Marks and dents within the leather can be 'worked out' using a boning tool. Work the marked area in a gentle circular motion to bring the fibres and natural oils back to the surface.

### AMALFINE™

*Alupewt (AP) - INT / Black Bronze (BB) - INT / Bone (BN) - INT / Cocoa (CO) - INT / Sand (SA) - INT / Silver Bronze (SB) - INT*

Wipe clean with a soft, damp cloth or soft brush using heavily diluted warm soapy water then dry with a clean, soft cloth. Once dry the Amalfine™ can be finished with a good quality beeswax.

Do not attempt to clean any finishes with abrasive or solvent based solutions.

INT – Suitable for Interior Applications  
EXT - Suitable for Exterior Applications