





PULL HANDLE FIXING OPTIONS

BOLT FIX – Timber or Glass doors. A single pull handle on one face of the door only, often specified with a push (or finger) plate on the opposing face. Also commonly used on wardrobe doors.


For glass door applications consider the S7555 decorative cap to cover the head of the fastener.



Supplied with
M10 x 50mm pan head bolts

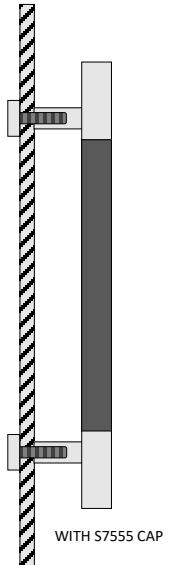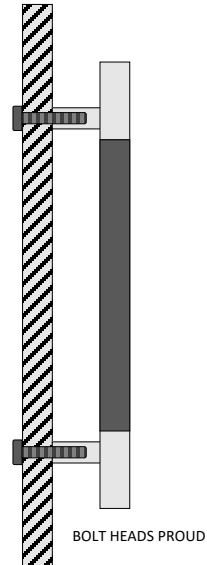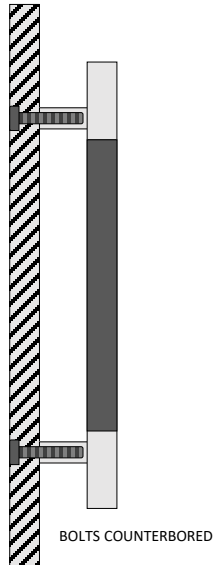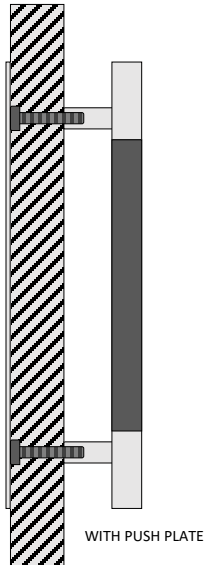

S7555 decorative cap
option for covering
M10 fastener head

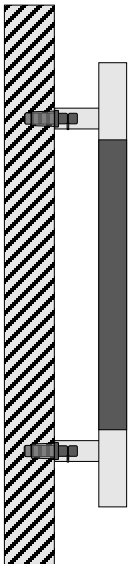

FACE FIX – Timber doors only, minimum door thickness of 30mm required. A single pull handle on one face of the door only; no fasteners visible on opposing face of door.



Supplied with
Threaded inserts for timber and M10
face fix spindles

Supplied with
M10 back to back spindles (maximum door
thickness 60mm).
Glass door kit includes washers and sleeves.



BACK TO BACK – Timber or Glass doors. A pair of pull handles, one on each face of the door. It is essential the door type (timber or glass) is specified when ordering.

